(19) World Intellectual Property Organization International Bureau



PC/T



(43) International Publication Date 22 March 2001 (22.03.2001)

(10) International Publication Number WO 01/20806 A1

(51) International Patent Classification7:

H04B 7/005

(21) International Application Number:

PCT/EP00/09105

(22) International Filing Date:

14 September 2000 (14.09.2000)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

9921989.1

16 September 1999 (16.09.1999) G

(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and


(75) Inventors/Applicants (for US only): LAAKSO, Janne

[FI/FI]; Paraistentre 17 c 44, FIN-00280 Helsinki (FI). SAHINOJA, Jari [FI/FI]; Sepelkyyhkyntie 3 B 24, FIN-02660 Espoo (FI)-HOLMA, Harri [FI/FI]; Itätuulenkuja 1 B 32, FIN-02100 Espoo (FI).

- (74) Agents: RUUSKANEN, Juha-Pekka et al.; Page White & Farrer, 54 Doughty Street, London WC1N 2LS (GB).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: TRANSMISSION POWER CONTROL IN A RADIO COMMUNICATION SYSTEM

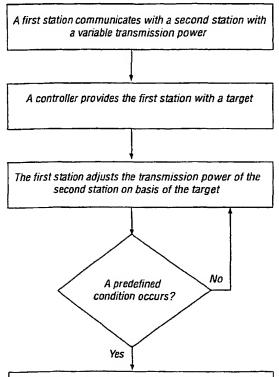

Set a temporary limit for the target and prevent use of a target exceeding the limit until the condition is over

(57) Abstract: The present invention relates to a method in a communication system. The system comprises a controller arranged to control transmission power of stations, a first station and a second station, the controller being arranged to provide the first station with a target for use in control of the transmission power of the second station, monitoring means, and means for preventing use of a target for the transmission parameter that exceeds a limit value. The controller provides the first station with the target and the first station adjusts the transmission power of the second station on basis of the target. A predefined condition is monitored, and upon occurrence of the predefined condition, use of a target for the transmission parameter exceeding a limit value for the target for the transmission parameter is prevented.

WO 01/20806 A1

IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

With international search report.